

# New Holland 770 and 780 Series Pull-type Rotary Cutters

770GC 780GC



Cut thick grass and weeds. Or shred stalks and brush. New Holland 770 and 780 Series pull-type, PTO-driven rotary cutters are all-purpose workhorses that easily handle tough jobs. What's more, the large flex-wing design offers easy, convenient transport between fields and down narrow roads.



## Up to 180" cutting width

Available in two models featuring 120" (rigid) and 180" (flex wing) cutting widths, 770 and 780 Series pull-type rotary cutters help you slash through tough conditions and large areas fast. Built with heavy-duty decks and gearboxes for superior reliability, 770 and 780 Series

cutters are designed for use with mid-range and high-horsepower tractors ranging from 60 to 210 maximum horsepower and equipped with a 540-rpm PTO.


## Built to cut through tough stuff

New Holland 770 and 780 Series heavy-duty, pull-type rotary cutters put rugged durability to work for the long haul:

- Protective deck rings and rear safety chains are standard equipment
- Wing lift hydraulics are standard
- Hitch swivel clevis allows easy hook-up
- Convenient jackstand
- Replaceable skid shoes
- 1/2" x 4" updraft blades provide even, clean cutting
- 150/95 hp gearbox on 770GC; 255/210 hp gearbox on 780GC. Includes a 5-year warranty (limited to defects in workmanship/material) on both models.

# New Holland 770 and 780 Series Rotary Cutter Specifications – Heavy-duty Pull-type

MODEL:	770GC	780GC
	10' Rigid	15' Triple Flex
Tractor HP (max.)	150 HP	210 HP
Cutting Width	120"	180"
Overall Width	126"	187"
Overall Length	114"	180"
Hitch	Pull Type	Pull Type
Driveline Category 540/1000	PT/CV Joint	PT/CV Joint
Gearbox Rating (HP)	150/95 HP	255/210 HP
Gearbox Warranty	5 Years	5 Years
Slip Protection	Slip Clutch	Slip Clutch
Deck Gauge	7 Gauge	7 Gauge
Side Panel Depth	8" x 1/4"	10.5" x 1/4"
Blade Carrier	Pan	Pan
Output Shaft Diameter	2"	2" or 2 3/8"
Blade Size	1/2" x 3" Updraft	1/2" x 4" Updraft
Blade Tip Speed Center/Out	14,995 fpm	15,238/14,821
Cutting Height (min.)	2 inch	2 inch
Tail Wheel	Dual Spindle	3 Spindle
Tire & Wheel	Laminated	Laminated
Safety Deflectors	Front/Rear Chains	Front/Rear Chains
Weight (lbs)	2425	5894

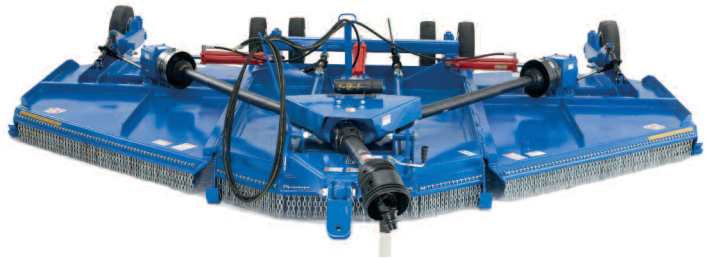

15' Triple Flex Model

## YOUR NEW HOLLAND DEALER



Visit our Web site at [www.newholland.com/na](http://www.newholland.com/na) Or, call toll-free: 1-888-290-7377

Design, materials and/or specifications are subject to change without notice and without liability therefor. Specifications are applicable to units sold in Canada, the United States, its territories and possessions, and may vary outside these areas.

© 2008 CNH America LLC  
New Holland is a registered trademark of CNH America LLC.



Safety begins with a thorough understanding of the equipment. Always make sure you and your operators read the Operator's Manual before using the equipment. Pay close attention to all safety and operating decals and never operate machinery without all shields, protective devices and structures in place.

NH9250804 • 10830 • MG • PRINTED IN U.S.A.