

NEW! New Holland 400GM Series Flex-Wing Finishing Mower

410GM 420GM 430GM



The New Rear Discharge Flex-Wing Finishing Mower series has been designed for golf courses, parks, or large areas. Each model features 3 floating decks with 4 wheels on each deck.

3 different cutting widths are available: 12', 15', or 17'. The Rear Discharge Flex-Wing finishing mower is designed to provide precise mowing and a smooth clean cut. Wing decks flex front to rear and side to side during working for better mowing on uneven terrain.

Cutter blades are made from special steel with high suction for grass lifting and a clean finish.

Excellent cutter heads overlap for 100% cutting, providing a clean finish cut every time you mow.

A mulching kit is available as optional equipment.

Standard features include:

- Hydraulic fold for easy transport and storage
- Spacers for quick and easy height adjustment on each deck
- Independent floating decks for precise cutting on uneven terrain
- Front Rollers
- Chain guards


Flex-Wing Finishing Mower is fitted with a tie rod system. While in transport position, the tie-rod system automatically keeps the side mowers in vertical position.

The adjustable hitch allows height adjustment to fit different types of tractors.

Transport latching mechanism automatically engages when decks are raised into transport position. Simply pull the release rope to lower the decks.

New Holland 400GM Series Flex-Wing Finishing Mower Specifications

Model Package Size, in.	410GM 100 60	420GM 200 72	430GM 300 90
Specifications			
Overall cutting width, ft.	12 Flex	15 Flex	17 Flex
Center deck cutting width, ft.	5	6	7.5
Wing deck cutting width, ft.	4	5	6
Deck overlap, in.	6	6	12
Overall width, in.	146	182	207
Transport width, in.	100	101	102
Maximum overall length, in.	182	185	196
Transport length, in.	177	180	188
Transport height, in.	90	100	110
Min. HP	30	35	40
Cutting height range, in.	1 to 5	1 to 5	1 to 5
Blasé tip speed, FPM	16,000	16,000	16,000
Caster wheels, 12	15 x 6.00-6	15 x 6.00-6	15 x 6.00-6
Transport tires, 2	26 x 12.00-12	26 x 12.00-12	26 x 12.00-12
Approx. weight, lbs.	2600	2800	3100

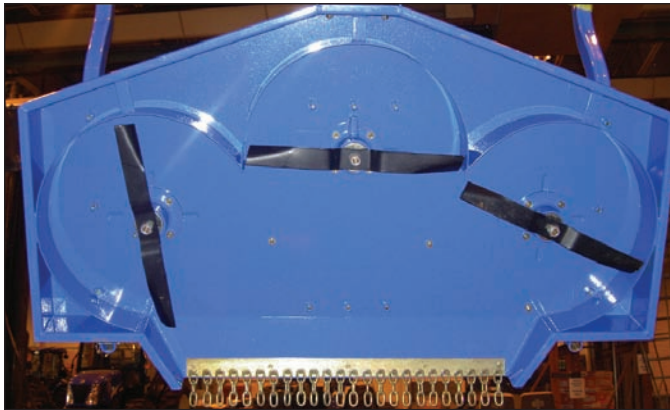

YOUR NEW HOLLAND DEALER



Visit our Web site at www.newholland.com/na Or, call toll-free: **1-888-290-7377**

Design, materials and/or specifications are subject to change without notice and without liability therefor. Specifications are applicable to units sold in Canada, the United States, its territories and possessions, and may vary outside these areas.



Safety begins with a thorough understanding of the equipment. Always make sure you and your operators read the Operator's Manual before using the equipment. Pay close attention to all safety and operating decals and never operate machinery without all shields, protective devices and structures in place.